

EVINRUDE


E-TEC

PERFORMANCE REPORT

BULLETIN #: 1166
ENGINE 1: E250XH

BOAT TYPE: Aluminum

DATE OF TEST: 8/14/2015

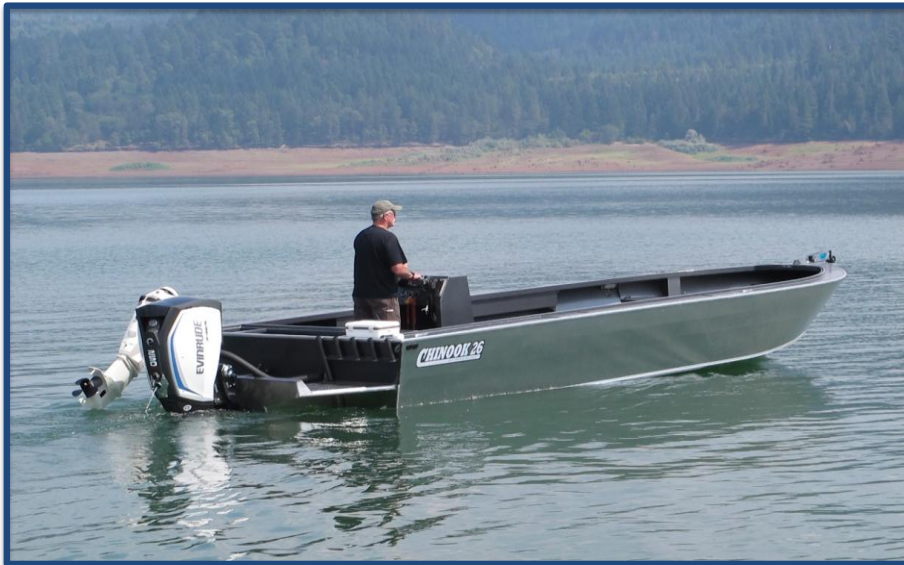

BRP US, Inc.
10101 Science Drive
Sturtevant, WI 52177
www.evinrude.com

Rogue
JET
BOATWORKS

Rogue Jet Boatworks
2845 Merry Lane
White City, Oregon 97503
541-944-2155
www.roguejet.com

2016 Rogue Jet 26 Chinook

BOAT

2016 Rogue Jet 26 Chinook

Material	Aluminum
Length	26'
Beam	102"
Weight w/o Engine	1500 LBS
Maximum HP	300 HP
Fuel Capacity	75 Gallons
Transom Height	25"
Steering	DPS

ENGINE

Evinrude® E-TEC® G2™ 250 H.O.

Engine Type	74° V-6
Horsepower	250 H.O.
Displacement	210 cu in / 3.4L
Induction	ETEC DI
Operating Range	5400-6000 RPM
Weight	558 LBS Dry Weight
Gear Ratio	1.85:1

PROPELLER

Rebel 19™

Material	Stainless
Diameter/Pitch	15 1/4" x 19"
No. of Blades	3
Part Number	763990

MOUNTING HEIGHT

Hole Position	#3
Jack Plate	No
AV Mounting	N/A

PERFORMANCE DATA

RPM	MPH	GPH	MPG	RANGE
500	2.90	0.20	14.50	979
1000	5.25	0.40	13.13	886
1500	7.65	1.30	5.88	397
2000	9.70	2.90	3.34	226
2500	13.85	4.40	3.15	212
3000	25.95	5.95	4.36	294
3500	31.50	7.65	4.12	278
4000	37.15	9.95	3.73	252
4500	41.30	11.20	3.69	249
5000	46.30	16.85	2.75	185
5500	51.00	20.70	2.46	166
5750	53.45	20.90	2.56	173

TEST CONDITIONS

Water Conditions	light chop
Wind Velocity	2 MPH
Air Temperature	80° F
Fuel Load	40 Gallons
Weight	two adults and safety equipment

PERFORMANCE SUMMARY

Top Speed	53.5 MPH
Best Fuel Efficiency	4.36 MPG For 294 Miles @ 25.95 MPH
Acceleration	3.5 seconds to plane

Fuel Data Range (Miles) Based On 90% Fuel Capacity



NOTE: Data may vary due to changes in weather and water conditions, elevation, load and boat bottom conditions, boat, engine and propeller options and conditions, and operator ability. Speed and fuel were calculated by NMEA 2000 I-Command. Test performed and certified by BRP OEM Applications Engineering.

© 2015 BRP US Inc. All rights reserved. ™ ® and the BRP logo are Trademarks and Registered Trademarks of Bombardier Recreational Products Inc. or its affiliates.

EVINRUDE
E-TEC®

